


## UPK Series (PTC Heating element)

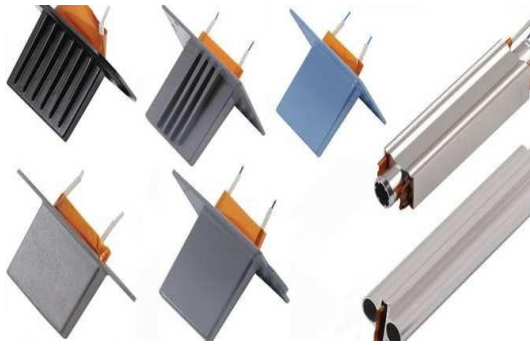

### DESCRIPTION

- PTC water heating element, give out the heat quickly
- Safety and stable, easy to fit, the power is 300-1000W.

### APPLICATION

- give out the heater quickly.
- Self-regulation through PTC characterizes, stable and secure
- Automatic temperature control, surface temperature: 80-280 degree Celsius.
- Customized order as per client's spec available.

### SPECIFICATIONS

Length (mm)	Width (mm)	Thickness (mm)	Surface temp./°C	High pot /V	Rated voltage/V	Appliances
30	21	6.8	60	1500	12~36	Constant temp.
30	21	6.8	70	3750	100~240	Constant temp.
30	21	6.8	80	1500	12~36	Constant temp.
40	25	6.8	100	1500	6~12	Constant temp.
30	21	6.5	130	1500	12~36	Constant temp.
30	21	6.8	135	3750	100~240	Constant temp.
31.5	40	7.0	135	3750	100~240	Wax melter
320	40	7.0	140	3750	100~240	Film coating
31.5	20	5.5	145	3750	00~240	Wax melter
40	25	6.8	210	1500	12~36	Constant temp. he